

Makrolon® Silent Sound UV/ AR

Solid polycarbonate sheet 8 mm



Your benefits:

- Tested safety according to ZTV-LSW06/ EN 14388
- Noise reduction DL_r : 27 dB
- 8 mm sheet thickness with extend UV protection
- Good fire rating

Solid **Makrolon® Silent Sound** sheets are clear, polished, UV-stabilized polycarbonate sheets. They offer extreme impact strength that exceeds the physical properties of other products of their class. Makrolon® sheets resist temperatures of -100 to +120 °C, exhibit high optical clarity and have a good fire rating.

Makrolon® Silent Sound sheets meet the sound technical requirements for noise reduction and the demands of road safety, stability such as form and ageing stability.

Makrolon® Silent Sound can be bent cold and also manufactured flat.

Applications:

Makrolon® Silent Sound can be used for noise protection barriers on motorways with heavy traffic, dual carriageways and railways.

The sheets offer protection against involuntary breakage and wilful destruction. **Makrolon® Silent Sound** sheets can be thermoformed, cold-curved and machined with ease.

	Test Conditions	Typical Values	Unit	Test Method
PHYSICAL				
Density		1.2	g/cm ³	ISO 1183-1
Moisture absorption	after storage in standard climate 23 °C/50 % RH	0.15	%	ISO 62-4
	after storage in water at 23 °C until saturation	0.35	%	ISO 62-1
Refractive index	20 °C	1.586	–	ISO 489
MECHANICAL				
Tensile stress at yield		> 60	MPa	ISO 527-2/1B/50
Elongation at yield		6	%	ISO 527-2/1B/50
Tensile strength		> 60	MPa	ISO 527-2/1B/50
Elongation at break		> 70	%	ISO 527-2/1B/50
Elastic modulus		2,400	MPa	ISO 527-2/1B/1
Limiting flexural stress		approx. 90	MPa	ISO 178
Impact strength	Charpy, unnotched	no break	kJ/m ²	ISO 179/1fU
	Charpy, notched	approx. 11	kJ/m ²	ISO 179/1eA
	Izod, notched	approx. 10	kJ/m ²	ISO 180/1A
	Izod, notched ¹⁾	approx. 70	kJ/m ²	ISO 180/4A
THERMAL				
Vicat softening temperature	Method B50	148	°C	ISO 306
Thermal conductivity		0.2	W/m K	DIN 52612
Coeff. of linear thermal expansion		0.065	mm/m °C	DIN 53752-A
Heat deflection temperature under load	Method A: 1.80 MPa	127	°C	ISO 75-2
	Method B: 0.45 MPa	139	°C	ISO 75-2
ELECTRICAL				
Dielectric strength		35	kV/mm	IEC 60243-1
Volume resistivity		10 ¹⁶	Ohm-cm	IEC 60093
Surface resistivity		10 ¹⁴	Ohm	IEC 60093
Dielectric constant	at 10 ³ Hz	3.1		IEC 60250
	at 10 ⁶ Hz	3		IEC 60250
Dissipation factor	at 10 ³ Hz	0.0005		IEC 60250
	at 10 ⁶ Hz	0.009		IEC 60250

The mechanical properties were measured on sheets of 4 mm or 3 mm⁽¹⁾ thickness.

Product Liability Clause: This information and our technical advice – whether verbal, in writing or by way of trials – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided – especially that contained in our safety data and technical information sheets – and to test products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery.



makrolon®
Silent Sound

Makrolon® Silent Sound UV/ AR


Solid polycarbonate sheet 8 mm



i-line

Ideas, innovative, intelligent, interesting...

Bayer Sheet Europe i-line represents the next generation of quality products. This seal guarantees innovative and intelligent first-class solutions at all times for a multitude of requirements.

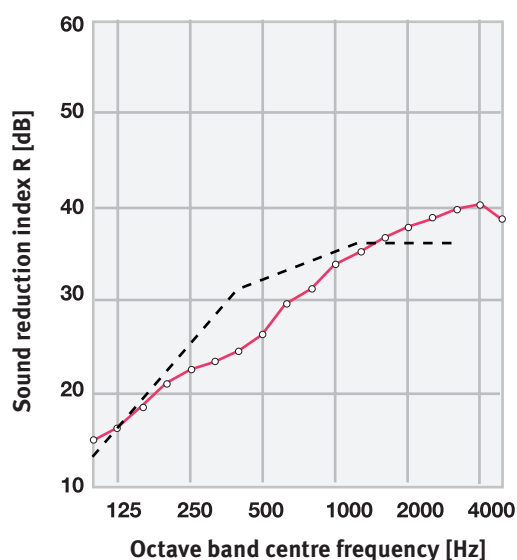

Results dB [EN ISO 140-3]		
Sum of deviation	28,5	
Average deviation	1,78	
Displacement designated curve	-18	
Sound reduction index R_w	32	
Spectrum adaptation terms		
	C	C_{tr}
100 - 3 150 Hz	- 1	- 5
100 - 5 000 Hz	- 1	- 5
50 - 3 150 Hz	- 1	- 5
50 - 5 000 Hz	- 1	- 5
$\Delta L_{A,R,Str}$ (ZTV-LSW 88)	30	
DL_R (DIN EN 1793-2)	27 (B3)	

European Certificates:	
Resistance to brushwood fire according to:	
DIN EN 1794-2, Annex A: Class 2	
ZTV-LSW 06, Section 2.5.4	
Impact of Stones according to:	
DIN EN 1794-1, Annex C: Passed	
Danger of falling debris according to:	
DIN EN 1794-2, Annex B: Class 3	



ООО «Торгово-Строительная Компания Империя»

109382, Россия, г.Москва, ул.Нижние поля, 31
 +7(495)646-81-65
 info@tbc-empire.ru
 www.tbc-empire.ru

LLC TBC Empire

109382, Russia, Moscow, Nizhniye polya,31
 +7(495)646-81-65
 info@tbc-empire.ru
 www.tbc-empire.ru